

CONSTRUCTION NOTES

SCALE: 1/4" = 1'-0"

NORTH

W3

- $\langle 1 \rangle$ NEW DRYWALL PARTITION 5/8" MOISTURE RESISTANT DRYWALL ON BOTH SIDES OF 4" 20 GAUGE METAL STUDS @ 16" O.C. EXTEND STUDS & DRYWALL TO UNDERSIDE OF DECK ABOVE. INSULATE WALLS FOR SOUND. INSTALL BLOCKING TO SUPPORT WALL HUNG CABINETS. REFER TO ELEVATIONS AND ROOM FINISH SCHEDULE FOR TILE AND/OR PAINT FINISH.
- $\langle 2 \rangle$ NEW DRYWALL CHASE PARTITION 5/8" MOISTURE RESISTANT DRYWALL ON ONE SIDE OF 4" 20 GAUGE METAL STUDS @ 16" O.C. TO 4" (MIN.) ABOVE HIGHEST ADJACENT FINISHED CEILING. INSTALL BLOCKING TO SUPPORT WALL HUNG FIXTURES. REFER TO ELEVATIONS AND ROOM FINISH SCHEDULE FOR TILE AND/OR PAINT FINISH.
- $\langle 3 \rangle$ install new 3'-0"x 7'-0" hollow metal doors & 2" frames. Door framing studs shall be doubled at EACH JAMB. INSTALL FLOOR ANCHOR CLIPS AS REQ. HARDWARE TO INCLUDE LEVER HANDLES. BUTTS, SILENCERS, CLOSERS & DOOR STOPS.
- $\langle 4 \rangle$ install New 2 tier 12"x18"x76" metal lockers (16 gauge) with legs. Each locker shall include NUMBER PLATE, 3 WALL HOOKS, DOUBLE CEILING HOOK, RECESSED HASP, SLOPING HOOD, FRONT BASE COVERS AND END BASE COVERS WHERE SIDES ARE EXPOSED, WALL ANCHOR BRACKETS SHALL BE INCLUDED TO SECURE TO WALL.
- $\langle 5 \rangle$ DRILL 2" ϕ HOLES & INSERT GROMMET RINGS AS SHOWN. 2 TOTAL.
- (6) LOWER SECTION WALL TO RECEIVE CERAMIC TILE AND UPPER SECTION SHALL BE PAINTED. REFER TO ELEVATION D, SHEET A2 FOR TILE HEIGHT.
- $\langle 7 \rangle$ NEW DRYWALL CEILING. SEE FINISH SCHEDULE, MECHANICAL PLAN SHEET MP1 & LIGHTING PLAN SHEET E1.
- $\langle 8 \rangle$ NEW 2x2 CEILING TILE, GRID, HVAC & LIGHTING. SEE FINISH SCHEDULE, MECHANICAL PLAN & LIGHTING PLAN
- 9 RE-INSTALL EXISTING TOILET PARTITIONS AND DOORS. FULLY CLEAN PARTITIONS, REPLACE BRACKETS WITH NEW PRIOR TO SETTING BACK INTO POSITION.

RESILIANT FLOORING (RES)

DRYWALL TYPE X AND PAINT (DW)

(10) INSTALL NEW ROBE HOOK, MOUNT @ 64" A.F.F.


SCALE: 1/4" = 1'-0"

(11) INSTALL NEW 18" WIDE TOWEL BAR, MOUNT @ 62" A.F.F.

CEILING PLAN LEGEND



2x4 LED LIGHTING (VA PROVIDED)



EXIT LIGHT W / SELF POWERED DUAL LIGHT W/ ATTACH 1-1/2 HOUR EMERGENCY LIGHT

RS1




SMOKE DETECTORS 120VAC


LED RECESSED CAN LIGHT



EXHAUST VENTS



SUPPLY VENT



FIRST FLOOR

18" 18" 16" LEFT HINGED DOOR

24" | 16" | 16" | MICRO WAVE

SCALE: 1/4" = 1'-0"

FLOOR PATTERN PLAN

NOTE: FLOOR TILE LAYOUT REPRESENTS "EXAMPLE ONLY". FINAL FLOOR

PATTERN SHALL BE FIELD DETERMINED BY VA INTERIOR DESIGN

ROOM ACCESSORY SCHEDULE								
	ER	MOUNTING HEIGHT ABOVE FLOOR	NOTES					
	M NUMBER		PROVIDE BLOCKING AND ANCHORS AS REQUIRED AND AS RECOMMENDED BY MFR.					
	TEM		SEE PLANS AND ELEVATIONS FOR ACCESSORY LOCATIONS.					
ACCESSORIES	\triangle	MO	A. BOTTOM OF DISPENSER					
SOAP DISPENSER	1	Α	TO BE IN LINE WITH BOTTOM OF MIRROR					
PAPER TOWEL DISP.	2	Α	UNLESS SHOWN OTHERWISE.					
PAPER HOLDER	3	С	B. BOTTOM OF MIRROR TO BE 39" ABOVE FLOOR.					
MIRROR	4	В	C. CENTERLINE OF PAPER					
			HOLDER TO BE 27" ABOVE FLOOR AND 36" FROM BACK WALL.					

ALL WALL CABINETS SHALL INCLUDE ANGLED TOPS -TO PREVENT DUST BUILD UP TYPICAL FOR ALL

24" WIDE COUNTERTOP WITH -


ELEVATION

SCALE: 1/2" = 1'-0"

4" BACK SPLASH

○ DEMOLITION NOTES

- (1) ENTIRE ROOM TO RECEIVE NEW FINISHES. REMOVE EXISTING VCT FLOORING. REMOVE COVE BASE WHERE IT EXISTS. REMOVE EXISTING LIGHTING, SUSPENDED CEILING TILE & GRID. PATCH FLOORS & WALLS AS REQUIRED FOR NEW FINISH. REMOVE WALL HUNG ITEMS AND STORE APPROPRIATELY AS DIRECTED BY COR FOR RE-INSTALLATION. APPLY ARDEX SELF LEVELING CONCRETE UNDERLAMENT AS REQUIRED.
- (2) REMOVE EXISTING ELEVATED FLOOR, DOORS, LOCKERS, SHOWER STALLS, MASONRY AND/OR STUD WALLS. PATCH FLOORS & WALLS TO REMAIN AS REQUIRED FOR NEW FINISH.
- (3) REMOVE ALL PLUMBING FIXTURES,& GRID. PATCH FLOORS & WALLS AS REQUIRED FOR NEW FINISH. PLUMBING CONTRACTOR TO REMOVE EXIST. PLUMBING FIXTURES AND CAP LINES AS REQUIRED. REFER TO PLUMBING DRAWING FOR DETAILS.
- (4) CAREFULLY REMOVE EXISTING MARBLE TOILET PARTITIONS AND DOORS. SAFELY SECURE FOR REINSTALLATION. FULLY CLEAN PARTITIONS AND BRACKETS PRIOR TO SETTING BACK INTO POSITION. INCLUDES PANELS INSTALLED ON BACK & SIDE WALLS
- $\langle 5 \rangle$ REMOVE HEATING UNIT AND ASSOCIATED PLUMBING CONNECTIONS. PATCH FLOORS & WALLS AS REQUIRED FOR NEW FINISH. PLUMBING CONTRACTOR TO REMOVE EXIST. PLUMBING AND CAP LINES AS
- (6) REMOVE SPRINKLER HEAD (SP), RELOCATE FIRE ALARM (FA) DEVICE TO LOCATION NOTED ON PROPOSED CEILING PLAN.

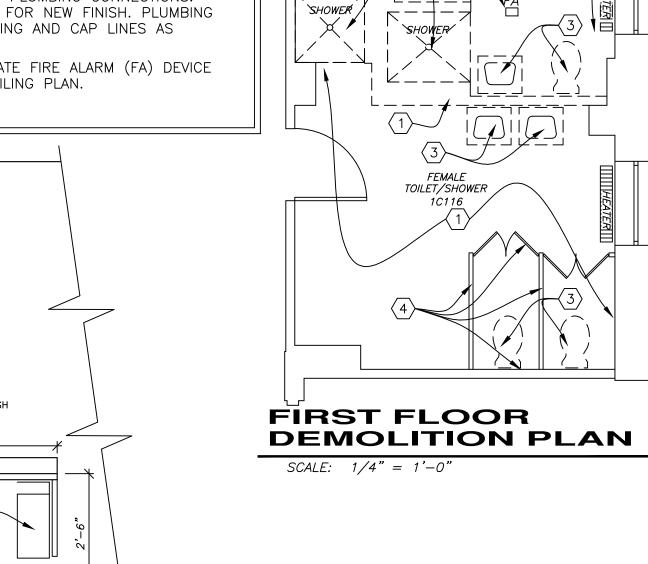


|||||HEATER

NORTH


└╴┙╸╸┪ ______

CLOSET


FEMALE LOCKER

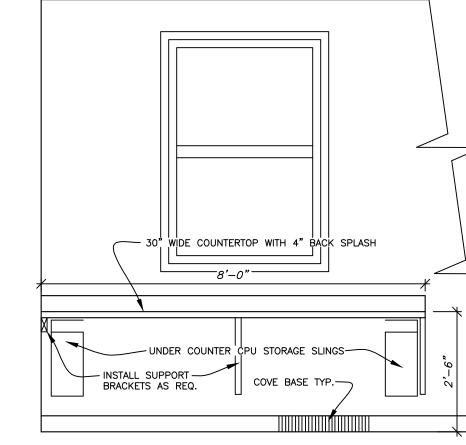


ELEVATION В

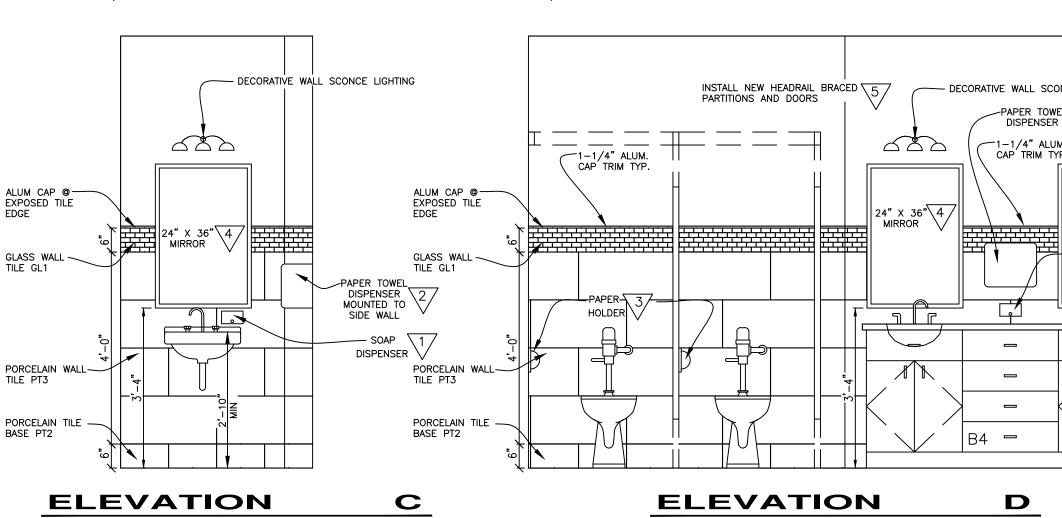

SCALE: 1/2" = 1'-0"

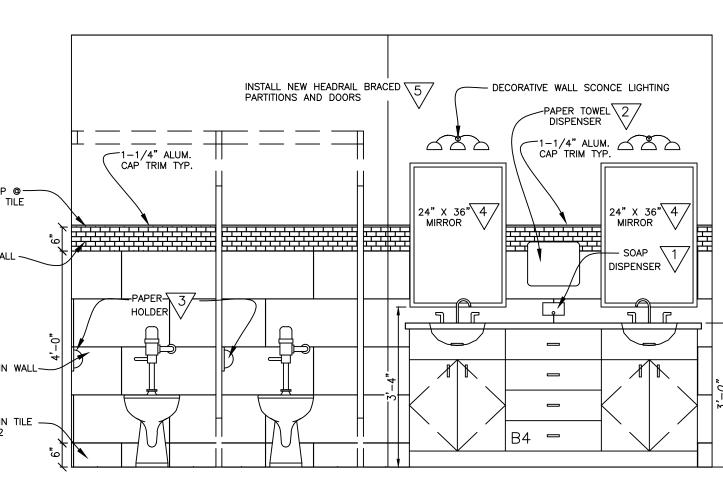

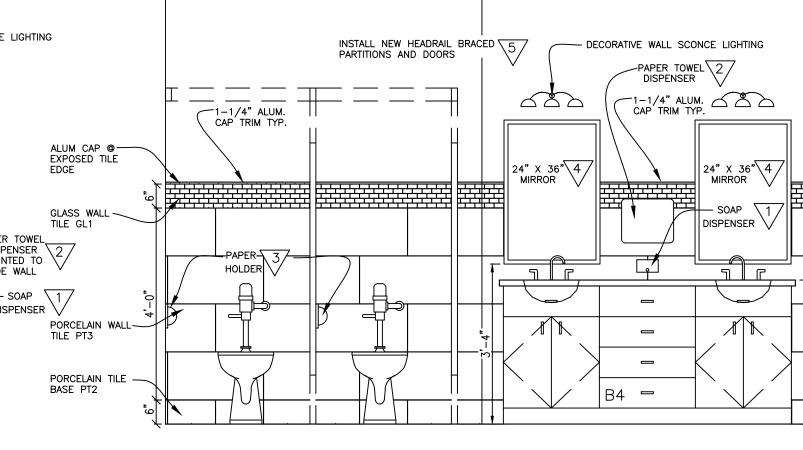

SCALE: 1/2" = 1'-0"

SCALE: 1/2" = 1'-0"	EL	EVATION	
	SCALE:	1/2" = 1'-0"	

ROOM FINISH SCHEDULE									
RM.NO.	ROOM NAME	FLOOR FINISH	BASE	WALLS	CEILING	NOTES			
1C115	LOUNGE/LOCKER	RES-1,2	RB	P1,2	ACT	SEE NOTES 1, 2, 4, 5. 6, 7, 9			
1C116A	WOMENS TOILET	PT	PT	PT/P4	ACT	SEE NOTES 1, 3, 4, 8, 9			
1C116	SHOWER	PT	PT	PT/P4	DW	SEE NOTES 1, 3, 4, 9			
	MATERIAL FINISH LEGEND_								

PORCELAIN TILE (PT)

ACCOUSTIC CEILING TILE (ACT)

FINISH NOTES: 1. ACCOUSTIC CEILING TILE (ACT) SHALL BE 2x2 LAY IN TYPE, WASHABLE, MOLD, BACTERIA & MILDEW RESISTANT. INSTALL

- 2. NEW PARTITION WALLS IN THIS ROOM SHALL BE PAINTED AND RECEIVE SAME FINISHES TO MATCH AS REQUIRED. REFER
- TO MATERIAL & COLOR LEGEND. 3. TOILET ROOMS SHALL RECEIVE COMBINATION PORCELAIN TILES FROM FLOOR TO 5'-O" AND PAINTED WALLS ABOVE, SEE ELEVATION DETAILS & MATERIAL & COLOR LEGEND. SHOWERS SHALL RECEIVE PORCELAIN TILES FROM FLOOR TO CEILING.
- 4. PAINT (P) 1 COAT SHERWIN WILLIAMS MULTI-PURPOSE LATEX PRIMER, 2 COATS SHERWIN WILLIAMS SEMI GLOSS LATEX
- FINISH. COLOR REFER TO MATERIAL & COLOR LEGEND. 5. RUBBER BASE (RB) SHALL BE 5-1/4" HIGH WITH CONTOUR, COLOR - MANNINGTON 918 FLAX.

RUBBER BASE (RB)

- 6. RESILIANT FLOORING (RES) TWO COLOR PATTERN T.B.D. REFER TO FLOOR PATTERN LAYOUT AND MATERIAL & COLOR
- LEGEND SHEET A2. 7. ONE ACCENT WALL SHALL BE PAINTED \$\frac{1}{2}\$ THIS ROOM. REFER TO MATERIAL & COLOR LEGEND SHEET A2.
- 8. STAINLESS STEEL WITH BRUSH FINISH PARTITIONS SHALL BE FLOOR SUPPORTED AND HEADRAILS BRACED, HARDWARE SHALL INCLUDE HINGES, COAT RACK, PAPER HOLDER, DOOR PULL, CONCEALED LATCH & DOOR STOP.
- 9. EVERY DOOR & FRAME SHALL BE PAINTED (P5) INCLUDE BOTH SIDES. REFER TO MATERIAL & COLOR LEGEND SHEET

CASEWORK SCHEDULE CASEWORK NOTES $S \mid Z \mid E \mid$ GENERAL CONTRACTOR TO VERIFY SIZE OF COUNTERTOPS. ADJ. DOORS DRWRS REMARKS MANUFACTURER'S CASEWORK CASEWORK TYPE NUMBER SERIES ALL CABINET JOINTS ARE TO BE FLUSH WITHOUT OVERLAPS. FIXTURES AND CONNECTIONS BY PLUMBING CONTRACTOR. 14" | 36" | 23" | DRAWERS COUNTER TOPS SHALL HAVE 4" H BACK SPLASH, FIELD JOINT & MARINE EDGED. 18" | 36" | 23" | DOOR/DRAWER 1 | 1 | COUNTER TOPS & BACKSPLASH SHALL SHALL BE SOLID SURFACE CORIAN. PROVIDE REAR, FRONT & CORNER FILLERS (SIZE VARIES) AS REQUIRED. В3 18" | 36" | 23" | SINK CABINET _ | 1 | _ ALL CASEWORK IS TO HAVE SOLID BACKS. 72" 36" 23" CUSTOM VANITY SINK 2 5 ALL DIMENSIONS SHOWN ON CASEWORK SCHEDULE ARE NOMINAL DIMENSIONS. 14" | 18" | 16" | LEFT HINGED DOOR 1 | 1 | -18" | 18" | 16" | LEFT HINGED DOOR W2 2 | 1 | -

2 | 1 | -

